

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

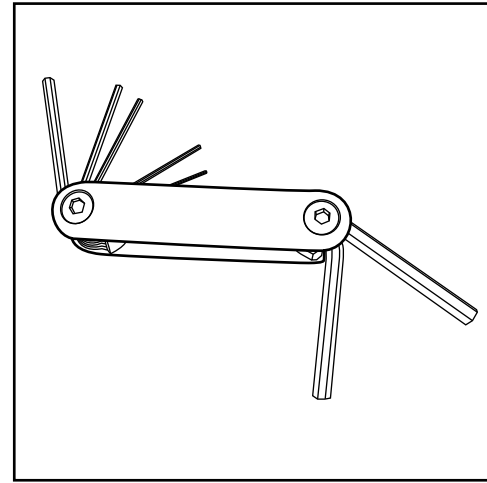


Hex Tool - Essential for Assembly

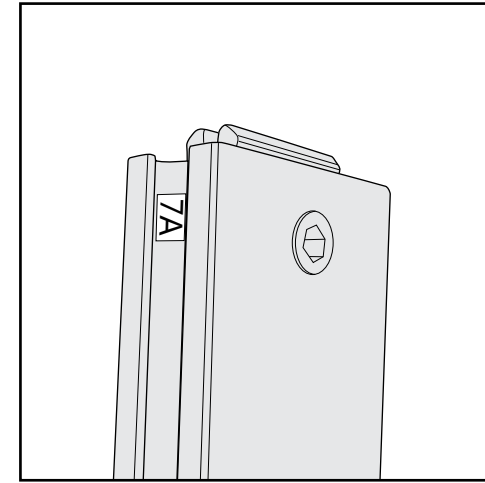


Part Identification - Numbering

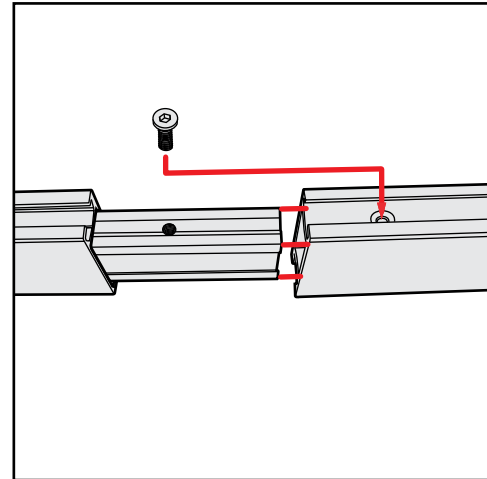


Spline Connection

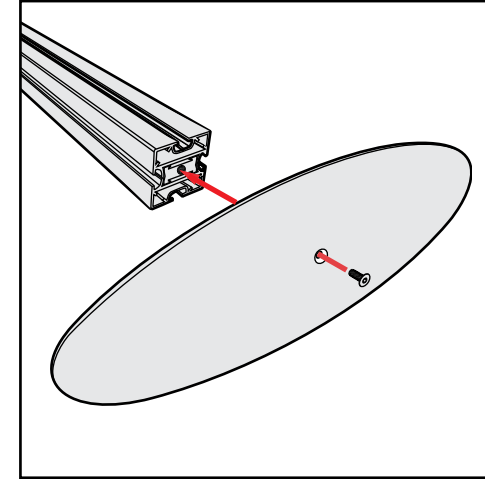

Base Plate & Extrusion Connection

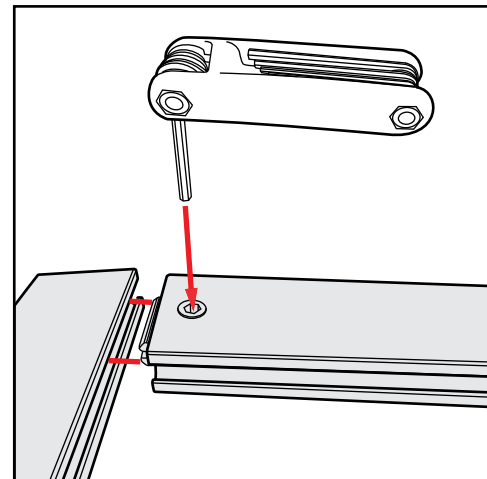

Extrusion & Lock Connection

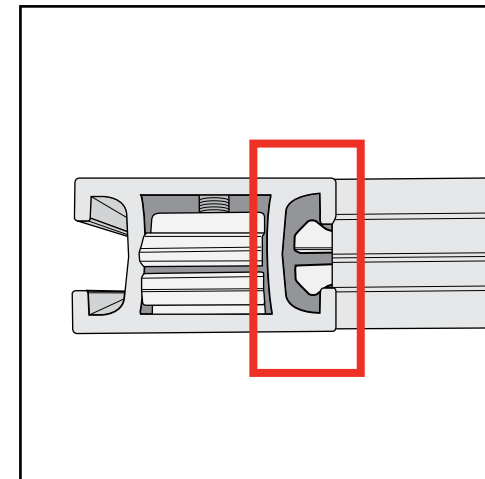


Engaged Lock



**WARNING**




DO NOT USE POWER TOOLS




LADDERS OR LIFTS  
MAY BE REQUIRED



ALL CONNECTIONS MUST  
BE TIGHTLY SECURED

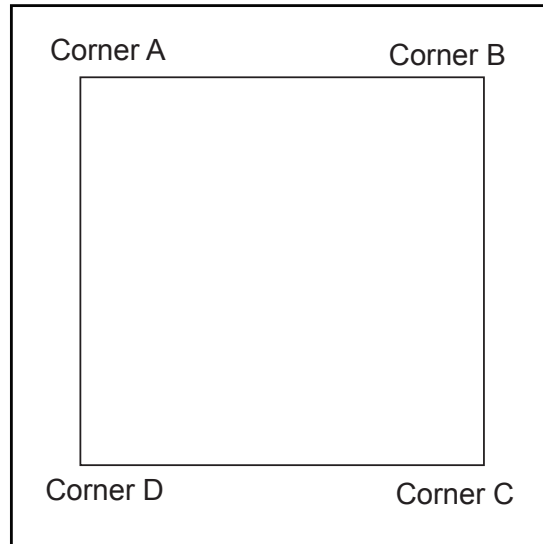

It is important to first insert graphic into each alternate corner then to the sides of the frame. If this is not done, graphic will not fit into the frame correctly.

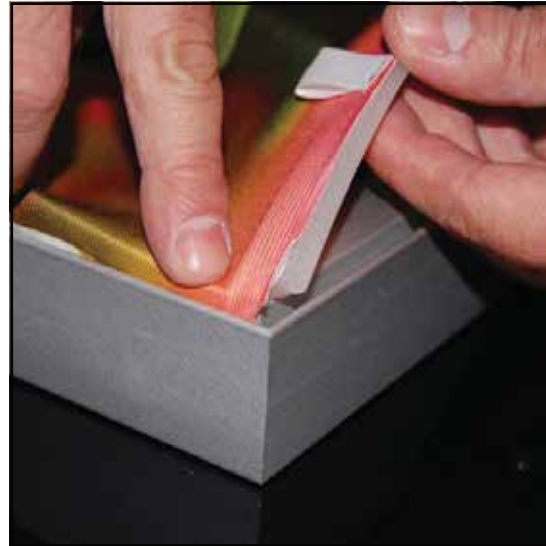

**Step 1**  
Insert corner A. Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side of welt with fabric to outside into the channel. Repeat for other side of this corner.




**Step 2**  
Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of the corners.



**Step 3**  
Once all corners are inserted, press one silicon edge into channel from corners and work toward the center. Make sure welt is fully inserted into channel. Continue until all sides are done. Smooth out edges of graphic.




### Graphic Removal

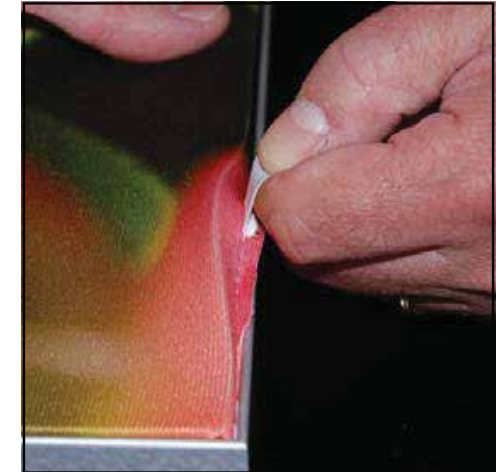





To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.

| Item | Qty. | Description                            |
|------|------|----------------------------------------|
| 1,1A | 1,1  | 45" TSP46 Vertical Extrusion w/ Clamps |
| 2,2A | 1,1  | 45" TSP46 Vertical Extrusion w/ Clamps |
| 3,3A | 1,1  | 45" TSP46 Horizontal Extrusion         |
| 4,4A | 1,1  | 45" TSP46 Horizontal Extrusion         |
| 5,5A | 1,1  | 43.2085" Z45 Vertical Extrusion        |
| 6    | 2    | Base Plate                             |

- Steps:
- 1) Assemble extrusions [1] [1A] [2] [2A] [3] [3A] [4] and [4A] together. See **Corner** and **Straight** details.
  - 2) Attach extrusions [5] and [5A] inside assembled frame. See **Z45 Vertical Placement** and **Z45 Connection** details.
  - 3) Apply SEG graphic to front of assembled frame. See SEG Installation sheet for instruction.
  - 4) Connect base plate [6] to extrusions [1] and [2]. See **Base Plate Attachment** detail.

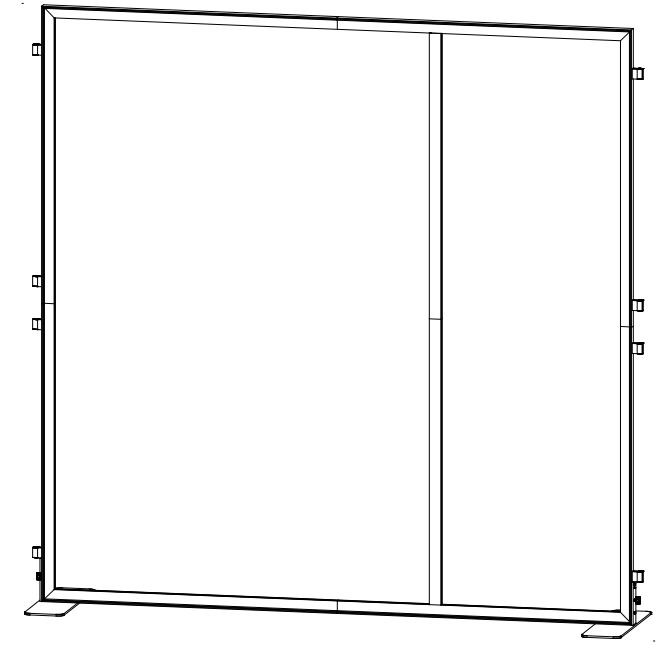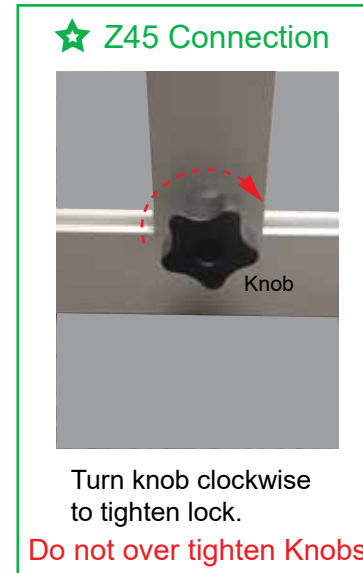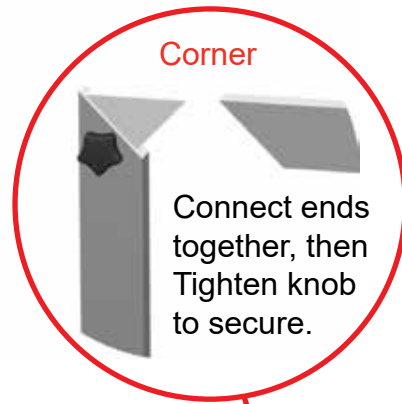


Completed Assembly

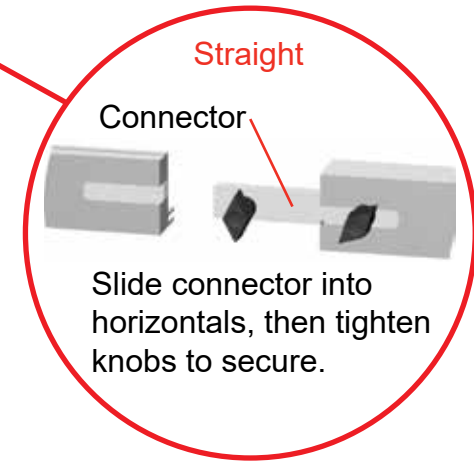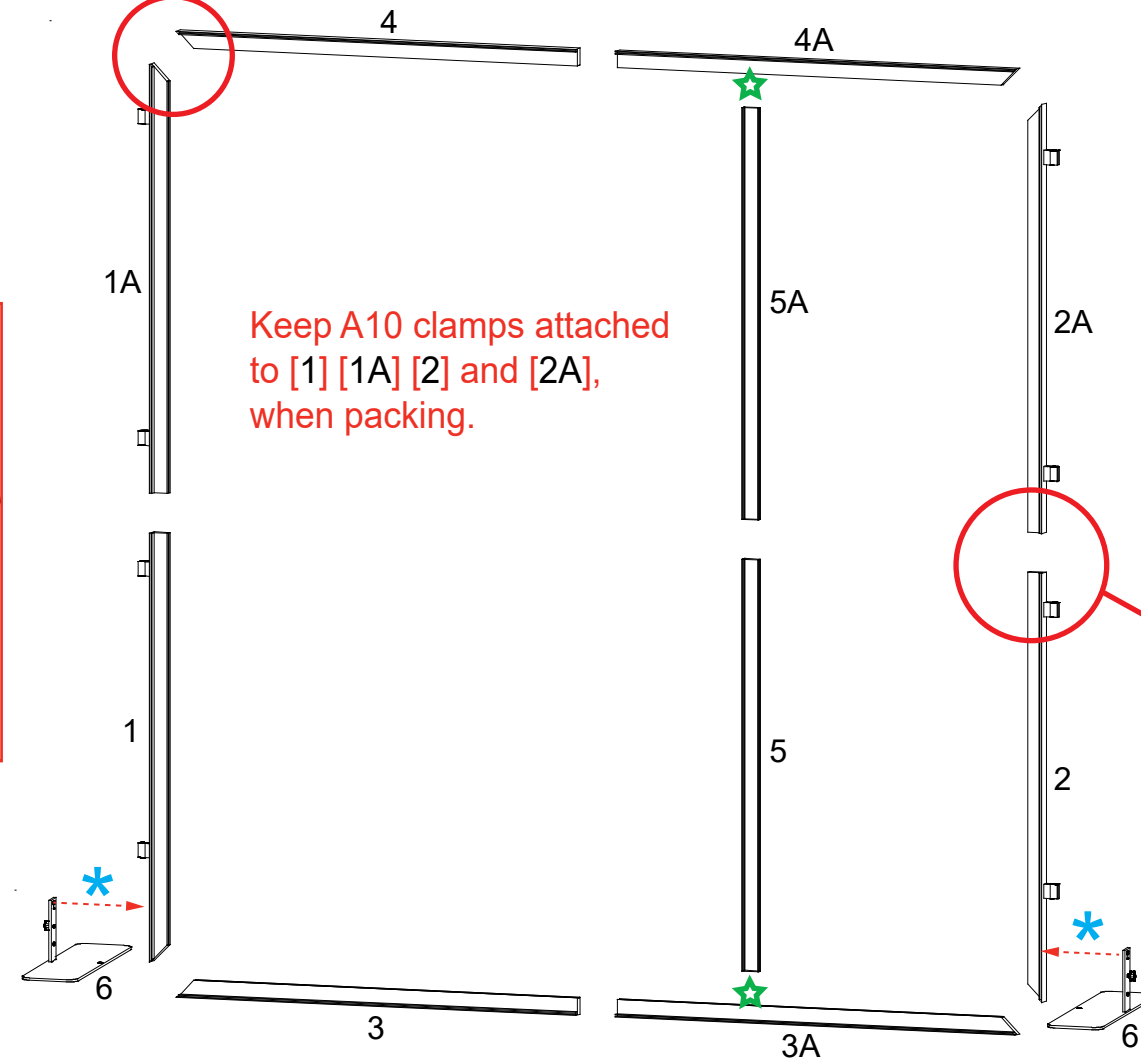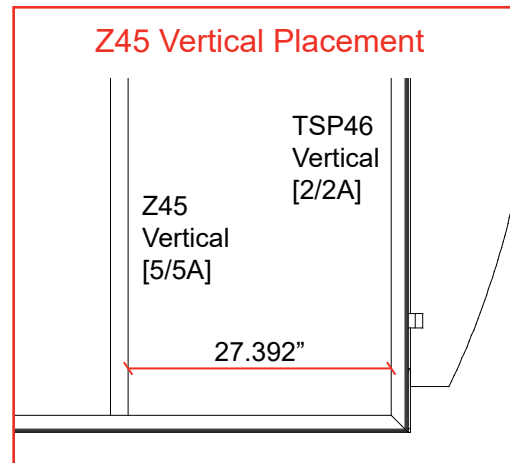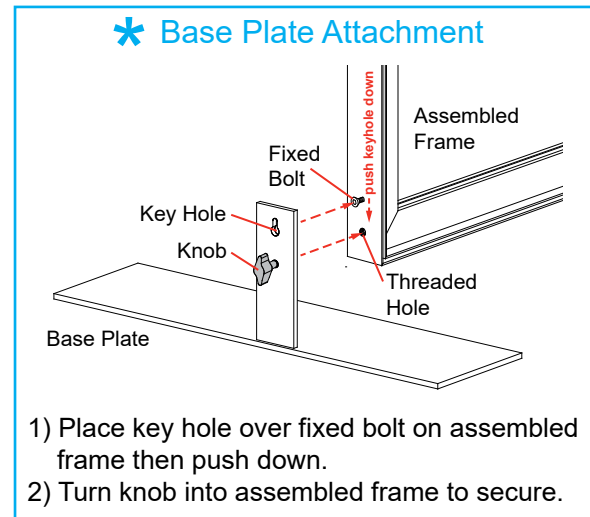

| Item | Qty. | Description                            |
|------|------|----------------------------------------|
| 1,1A | 1,1  | 45" TSP46 Vertical Extrusion w/ Clamps |
| 2,2A | 1,1  | 45" TSP46 Vertical Extrusion w/ Clamps |
| 3,3A | 1,1  | 45" TSP46 Horizontal Extrusion         |
| 4,4A | 1,1  | 45" TSP46 Horizontal Extrusion         |
| 5,5A | 1,1  | 43.2085" Z45 Vertical Extrusion        |
| 6    | 2    | Base Plate                             |

Steps:

- 1) Assemble extrusions [1] [1A] [2] [2A] [3] [3A] [4] and [4A] together. See TSP46 Tool-Less Assembly sheet for instruction.
- 2) Attach extrusions [5] and [5A] inside assembled frame, using tool-less straight connector. See Z45 Vertical Placement and Z45 Connection details.
- 3) Apply SEG graphic to front of assembled frame. See SEG Installation sheet for instruction.
- 4) Connect base plate [6] to extrusions [1] and [2]. See Base Plate Attachment detail.

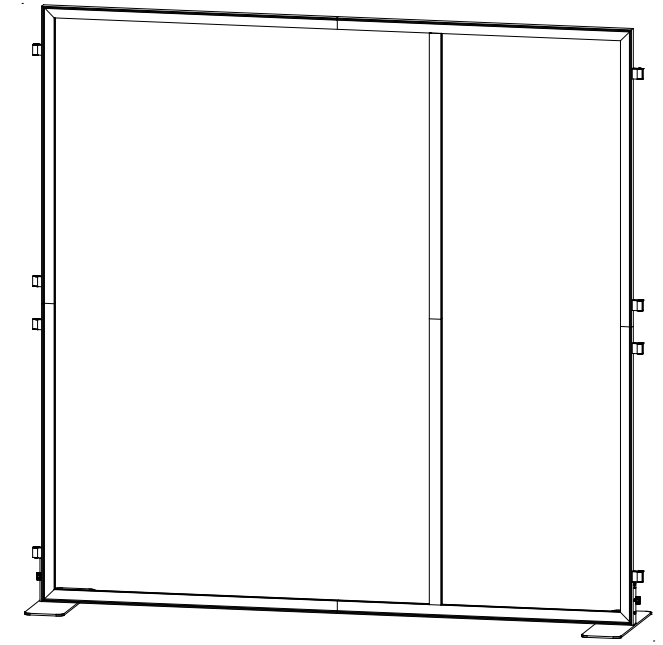

Completed Assembly

**\* Base Plate Attachment**


- 1) Place key hole over fixed bolt on assembled frame then push down.
- 2) Turn knob into assembled frame to secure.

**Z45 Vertical Placement**

TSP46 Vertical [2/2A]

Z45 Vertical [5/5A]

27.392"

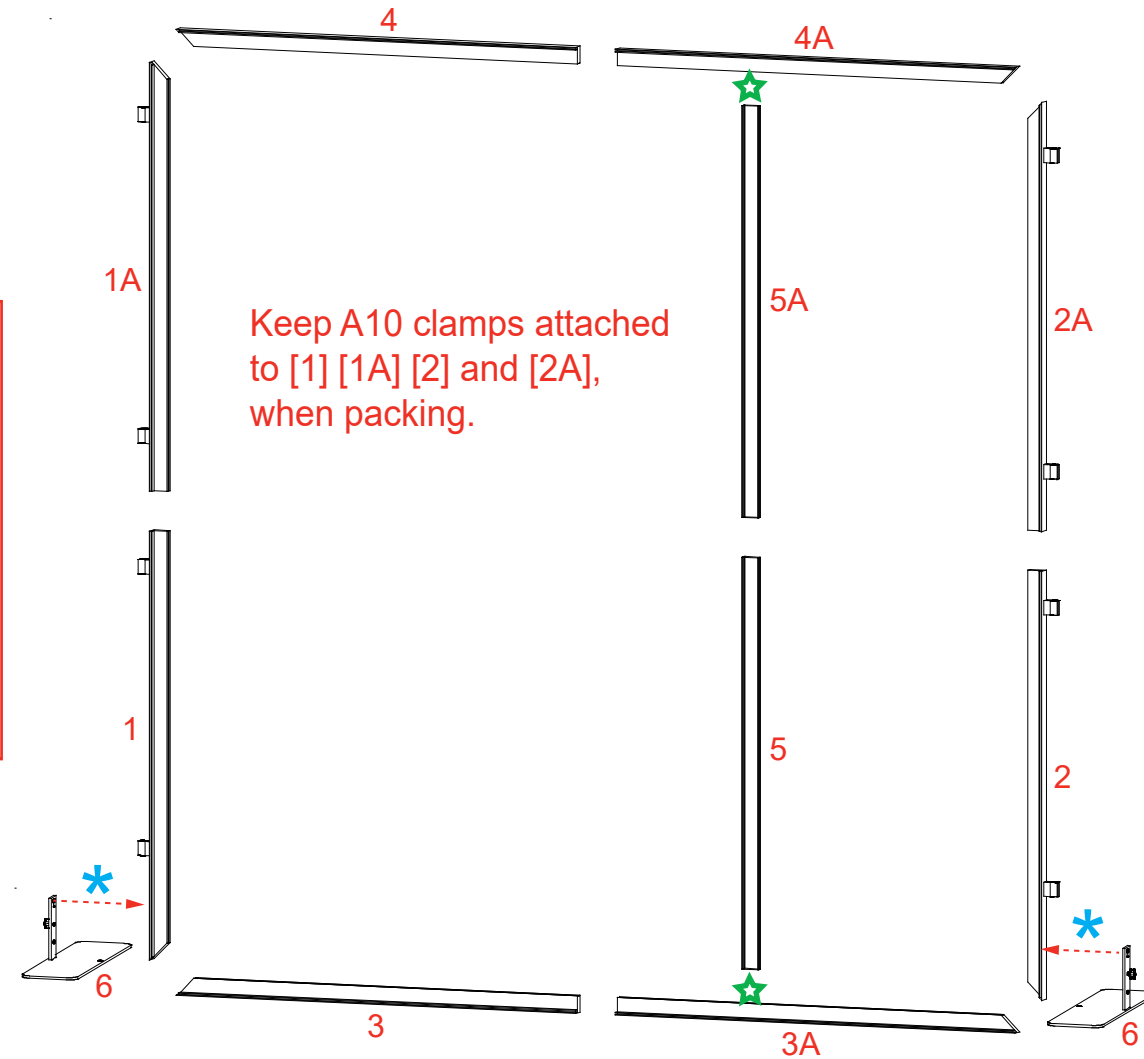

**★ Z45 Connection**


Knob

Turn knob clockwise to tighten lock.

Do not over tighten Knobs


Setups:

- 1) Attach wings to clamps, as shown. See [A10 Clamp Attachment](#) detail.
- 2) Attach monitor mounts to [5A] and [5A], using bolts.  
See [Monitor Mount Attachment](#) detail.
- 3) Attach lights to top of assembled frames. See [Light Connection](#) detail.

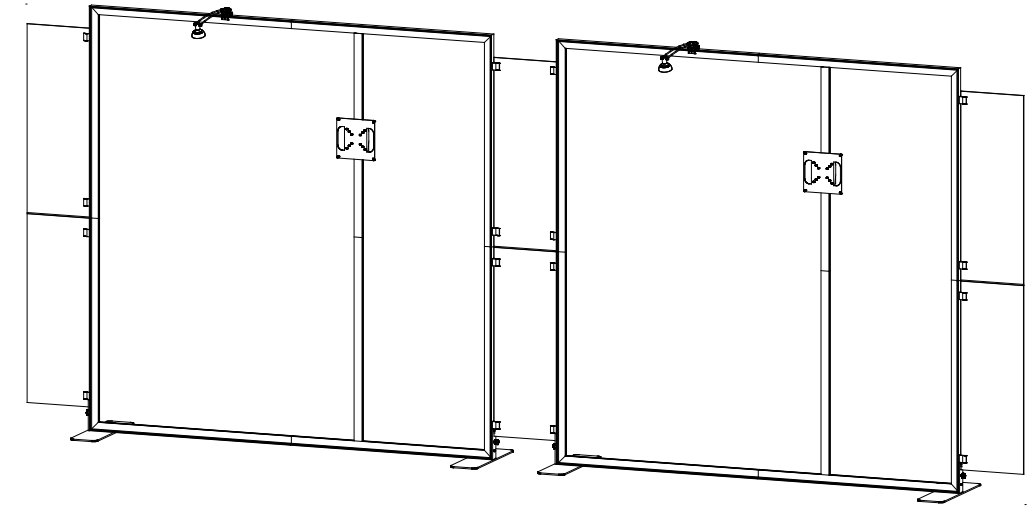


Completed Assembly

**A10 Clamp Attachment**




Screw A10 clamp to Vertical Extrusion.




Tighten knob to secure wing in place.

Clamps should NOT be removed. Leave attached when packing.

**\* Monitor Mount Attachment**

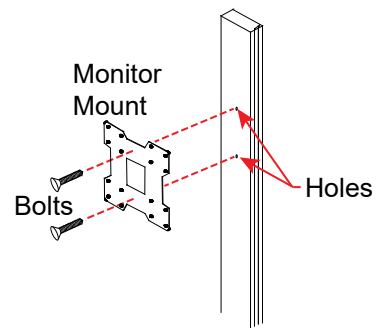

Attach monitor mount to vertical [5A], using bolts provided.

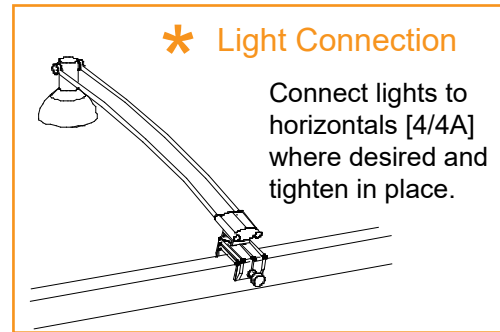

**\* Light Connection**

Connect lights to horizontals [4/4A] where desired and tighten in place.

