


Steps:

- 1) Attach base plate to straight end of post, using bolt.
- 2) Attach plate to curved end of post, using bolt.

 NOTE: Plate must rotate to left and right before installing shell.
- 3) Attach shell to plate, using hex nuts.
- 4) Insert tablet in shell, then feed cords through holes. See Cord Management for Tablet detail.

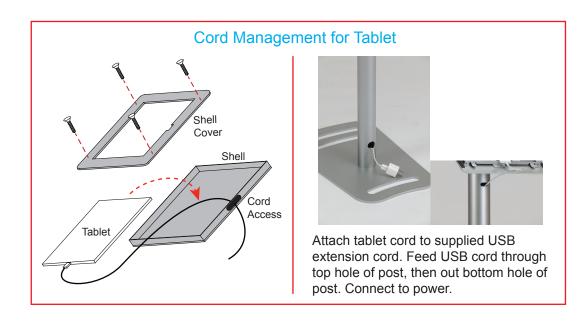

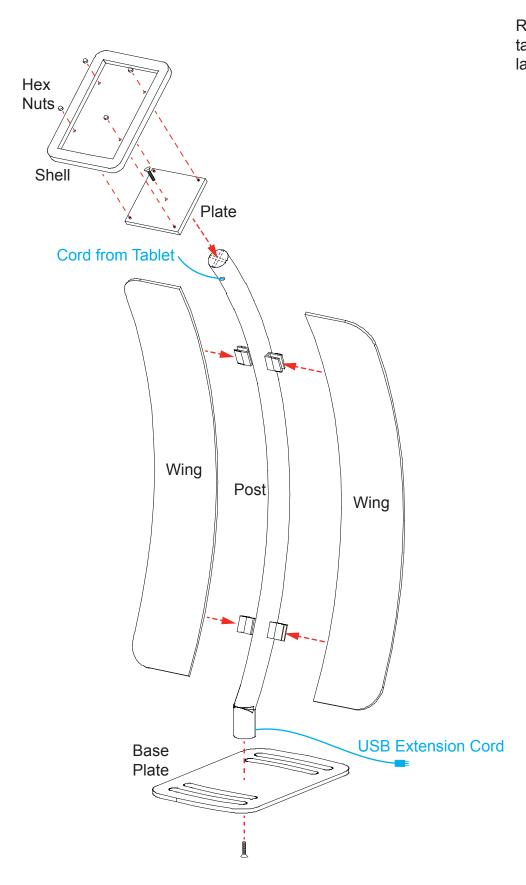

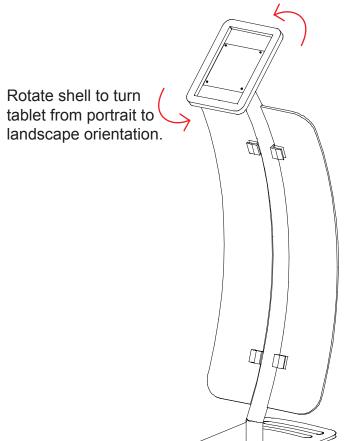

Completed Assembly

SETUP INSTRUCTIONS

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a MILD NON-ABRASIVE cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly

- For loss prevention, tighten all setscrews and locks during disassembly




Hex Tool - Essential for Assembly




Part Identification - Numbering



MARNING



Spline Connection




Base Plate & Extrusion Connection




DO NOT USE POWER TOOLS



LADDERS OR LIFTS MAY BE REQUIRED



Extrusion & Lock Connection



Engaged Lock



ALL CONNECTIONS MUST BE TIGHTLY SECURED